
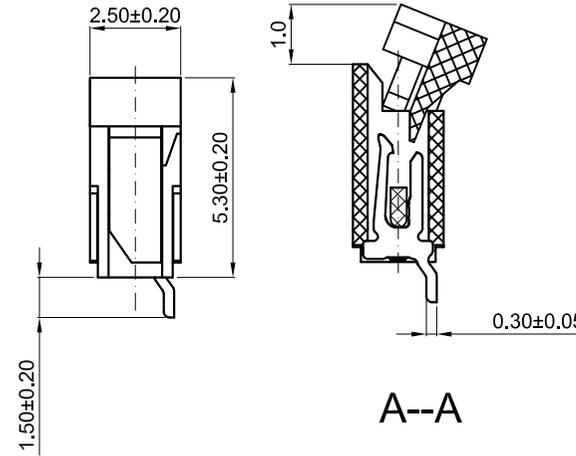


# 8 PINS 1.0 Pitch SMD Horizontal Type Top Contact



| Ver | Date         | Description         |
|-----|--------------|---------------------|
| 1.0 | July-26-2012 | Preliminary Release |

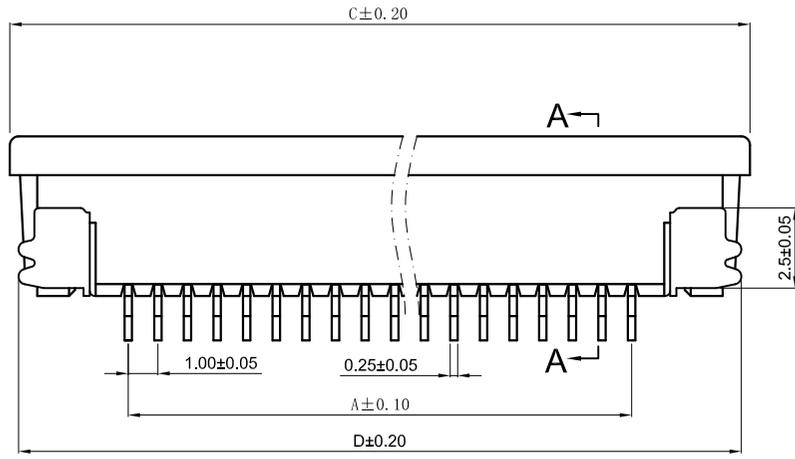

| Pin Num | A    | B    | C     | D     |
|---------|------|------|-------|-------|
| 8       | 7.00 | 9.30 | 15.10 | 14.10 |


### Material:


- 1、Housing: NYlon46 UL94V-0 Grey;
- 2、Loeker: PPS UL94V-0;
- 3、Contact: Phosphor bronze, tin/lead-plated;
- 4、Solder tab: Phosphor bronze, tin/lead-plated.

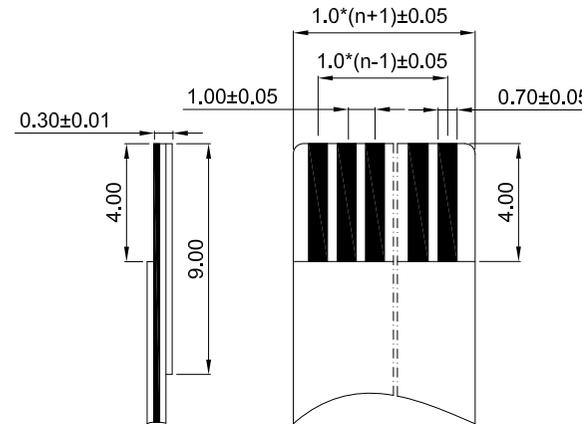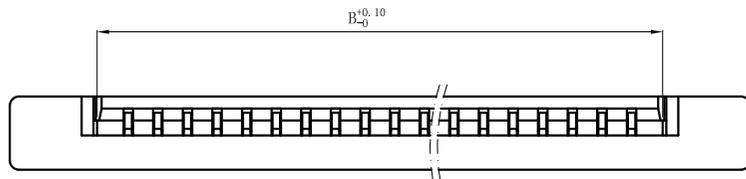

### Specification:

- 2、Unverified Tolerance should comply with SJ1372-79;
- 3、Temperature Range:  $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$ ;
- 4、Rated Voltage: 50V, AC, DC;
- 5、Contact Resistance:  $\leq 0.03 \Omega$ ;
- 6、Insulation Resistance:  $\geq 500\text{M} \Omega$ ;
- 7、Withstand Voltage: 500V, AC/minute.

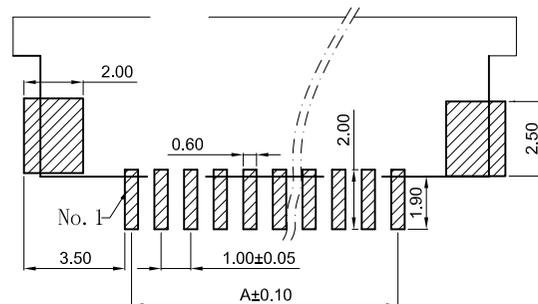

|   |   |                   |
|---|---|-------------------|
|  <b>旭日东方科技有限公司</b><br><b>EastRising Technology Co., Ltd.</b><br><small>www.lcd-china.com TEL: +86-755-33503873 FAX: +86-755-33507642-801</small> |  | <b>CD</b>         |
|   | UNIT: MM  | SIZE: A4          |
|   | SHEET: 1 OF 1   |                   |
| Part Number for Order: <b>ER-CON08HT-2</b>  |   |                   |
| DRAWN BY : Jim  | CHECKED BY: Tony  | APPROVED BY : Liu |